


The logo for easly Computer Services Co. features the word "easly" in a white, lowercase, cursive script font. The letter 'e' is stylized with a white, teardrop-shaped graphic element on its left side. Below "easly", the words "Computer Services Co." are written in a white, sans-serif font. The entire logo is enclosed within a white, hand-drawn, irregular oval border. The background is a solid blue color with several thin, white, wavy lines that sweep across the left and bottom portions of the image.

easly
Computer Services Co.

نصب و راه اندازی مودم (H/W : V1 , V2) DSL – 2740 U



- ۱- جهت ورود به صفحه تنظیمات دستگاه ، یک مرورگر باز کرده ، سپس آی پی **192.168.1.1** را وارد می کنیم.
- ۲- در این قسمت **admin** (با حروف کوچک) را وارد می کنیم.
- ۳- در این قسمت هم **admin** (با حروف کوچک) را وارد می کنیم.
- ۴- در آخر روی گزینه **Log In** کلیک می کنیم.

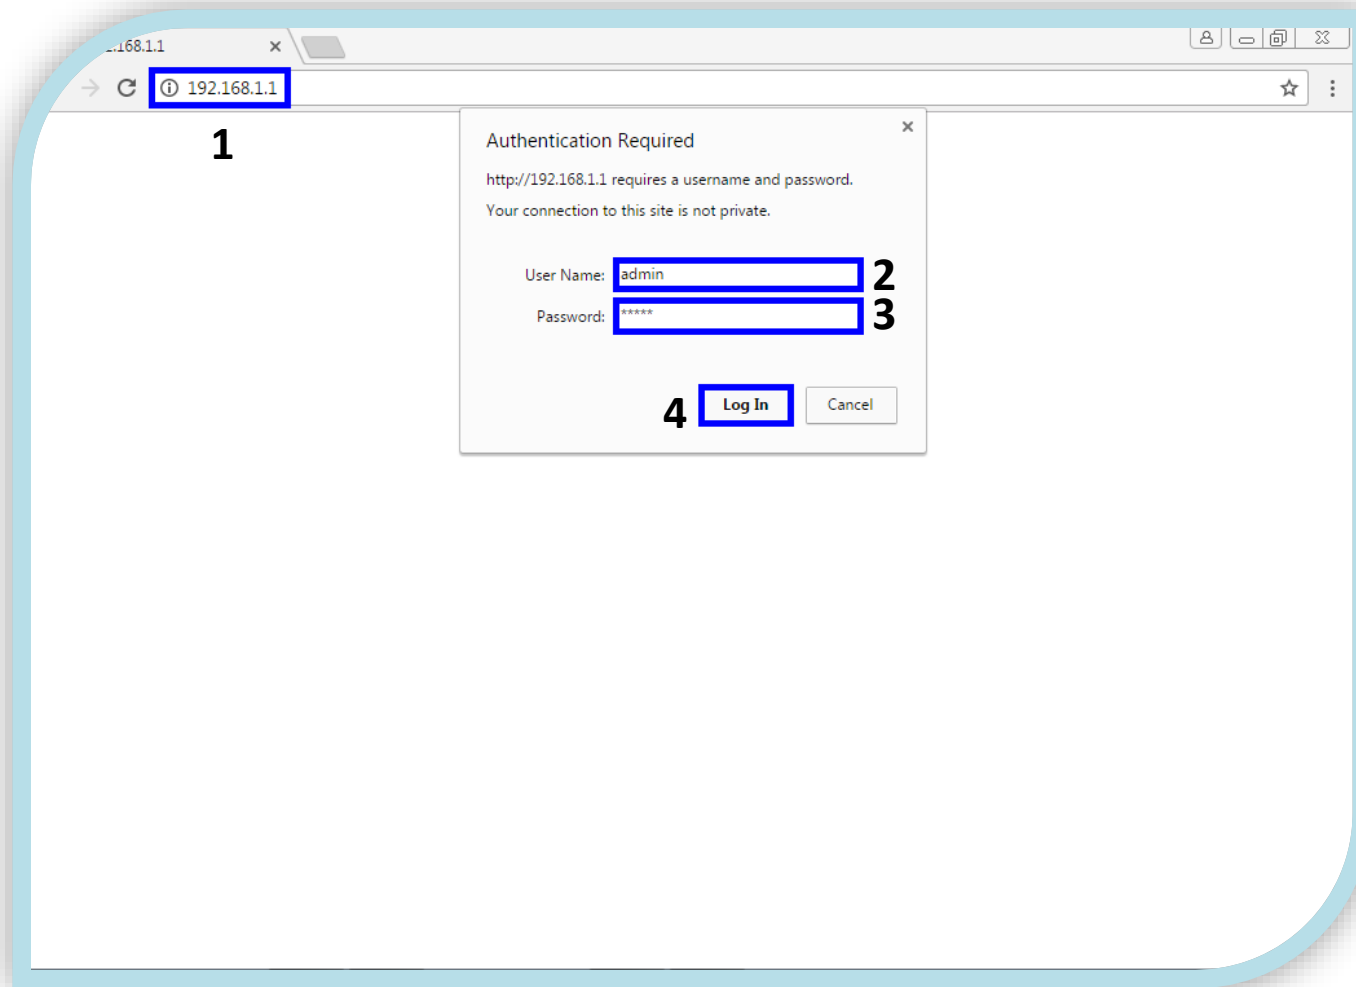

۱- برای تنظیمات اینترنت ، ابتدا روی **Setup** کلیک می کنیم.

۲- سپس **Internet Setup** را انتخاب می کنیم.

The screenshot shows the web interface of a D-Link DSL-2740U router. The browser address bar shows the IP address 192.168.1.1. The page header includes the product name 'DSL-2740U' and the firmware version 'ME_1.04'. The main navigation menu has tabs for 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'SETUP' tab is selected and highlighted with a blue box, with a red '1' next to it. Under the 'SETUP' tab, there is a sub-menu with options: 'Wizard', 'Local Network', 'Internet Setup', 'Wireless Setup', and 'Time and Date'. The 'Internet Setup' option is selected and highlighted with a blue box, with a red '2' next to it. The main content area is titled 'SETTING UP YOUR INTERNET' and contains the following text: 'There are two ways to set up your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection. Please make sure you have your ISP's connection settings first if you choose manual setup.' Below this text is a section titled 'INTERNET CONNECTION WIZARD' with the text: 'You can use this wizard for assistance and quick connection of your new D-Link Router to the Internet. You will be presented with step-by-step instructions in order to get your Internet connection up and running. Click the button below to begin.' A 'Setup Wizard' button is visible. A 'Note' at the bottom of the wizard section reads: 'Note: Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the router.' On the right side of the page, there is a 'Helpful Hints...' section with text: 'First time users are recommended to run the Setup Wizard. Click the Setup Wizard button and you will be guided step by step through the process of setting up your ADSL connection. If you consider yourself an advanced user or have configured a router before, click Setup->Internet Setup to input all the settings manually.' A 'More...' link is also present.

۱- در پایین صفحه ، با این جدول رو به رو می شویم ، ابتدا روی عکس سطل زباله کلیک می کنیم.

نکته : در صفحه تنظیمات (H/W:A1) u DSL-2740 این جدول ظاهر نمی شود .

168.1.1

Local Network
Internet Setup
Wireless Setup
Time and Date

CHANNEL CONFIGURATION

This page is used to configure the parameters for the channel operation modes of your ADSL Modem/Router. Note: When connection type for PPPoE or PPPoA is set to "Manual", the "Connect" and "Disconnect" button will be enabled.

WAN PHYSICAL TYPE

WAN Physical Type: ADSL WAN Ethernet WAN

DEFAULT ROUTE SELECTION

Default Route Selection: Auto Specified

CHANNEL CONFIGURATION

VPI: VCI: Encapsulation: LLC VC-Mux
 Channel Mode: Enable NAPT: Enable IGMP:
 802.1q: Disable Enable VLAN ID(1-4095):

PPP Settings: User Name: Password:
 Type: Idle Time (min):

WAN IP Settings: Type: Fixed IP DHCP
 Local IP Address: Remote IP Address:
 Netmask:

Default Route: Disable Enable Auto
 Unnumbered

Connect Disconnect Add Modify Delete Undo Refresh

CURRENT ATM VC TABLE:

Select	Inf	Mode	VPI	VCI	Encap	NAPT	IGMP	DRoute
<input type="radio"/>	pppoe1	PPPoE	0	35	LLC	On	Off	On

IP Addr	Remote IP	NetMask	User Name	Status	Edit
0.0.0.0	0.0.0.0	255.255.255.255	hde9128916@tc	Down	1

Helpful Hints...
 When configuring the router to access the Internet, be sure to choose the correct connection mode from the list below.
 Please take care when entering your username and password as these are case sensitive. The majority of connection issues are caused by incorrect username or password combinations.
 Note: Be sure to restart the router for the new Internet Setting to take effect.
 More...

802.1q: 192.168.1.1 says:
Are you sure you want to delete?

1 OK Cancel

WAN IP Settings:
Type: Fixed IP DHCP
Local IP Address: Remote IP Address:
Netmask:
Default Route: Disable Enable Auto
Unnumbered

Connect Disconnect Add Modify Delete Undo Refresh

CURRENT ATM VC TABLE:

Select	Inf	Mode	VPI	VCI	Encap	NAPT	IGMP	DRoute
<input type="radio"/>	pppoe1	PPPoE	0	35	LLC	On	Off	On

IP Addr	Remote IP	NetMask	User Name	Status	Edit
0.0.0.0	0.0.0.0	255.255.255.255	hde9128916@tct8	Down	

BROADBAND

Copyright © 2005-2015 D-Link Systems, Inc.

۱- در این قسمت VPI و VCI سرویس دهنده (ISP) را وارد می کنیم.

۲- این قسمت را روی PPPoE قرار می دهیم.

Product Page: DSL-2740U Firmware Version: ME_1.03

D-Link

DSL-2740U // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
Local Network
Internet Setup
Wireless Setup
Time and Date

CHANNEL CONFIGURATION

This page is used to configure the parameters for the channel operation modes of your ADSL Modem/Router. Note : When connect type of PPPoE and PPPoA only is "Manual", the "Connect" and "Disconnect" button will be enable.

WAN PHYSICAL TYPE

WAN Physical Type: ADSL WAN Ethernet WAN

DEFAULT ROUTE SELECTION

Default Route Selection: Auto Specified

CHANNEL CONFIGURATION

VPI: 0 VCI:

Channel Mode: Bridge
Bridge
DHCP(Static IP)
PPPoE
PPPoA
1483 Routed
IPoA

802.1q: Disabled Enabled

Encapsulation: LLC VC-Mux

Enable NAPT: Enable IGMP:

VLAN ID(1-4095):

PPP Settings:

Type: Continuous

Password:

Idle Time (min):

WAN IP Settings:

Type: Fixed IP DHCP

Helpful Hints...

When configuring the router to access the Internet, be sure to choose the correct **Channel Mode** from the list below.

Please take care when entering your **passwords** and **passwords** as these are case sensitive. The majority of connection issues are caused by incorrect **passwords** or **passwords** combinations.

Note: Be sure to restart the router for the new Internet Setting to take effect.

[More...](#)

- ۱- در این قسمت نام کاربری (Username) و رمز عبور (Password) سرویس دهنده را وارد می کنیم.
- ۲- در آخر گزینه Add را انتخاب می کنیم.

and "Disconnect" button will be enable.

choose the correct Channel Mode from the list below.

Please take care when entering your Username and Password as these are case sensitive. The majority of connection issues are caused by incorrect Username or Password combinations.

Note: Be sure to restart the router for the new Internet Setting to take effect.

More...

Wireless Setup

Time and Date

WAN PHYSICAL TYPE

WAN Physical Type: ADSL WAN Ethernet WAN

DEFAULT ROUTE SELECTION

Default Route Selection: Auto Specified

CHANNEL CONFIGURATION

VPI: VCI: Encapsulation: LLC VC-Mux

Channel Mode: Enable NAPT: Enable IGMP:

802.1q: Disable Enable VLAN ID(1-4095):

PPP Settings: User Name: Password: **1**

Type: Idle Time (min):

WAN IP Settings: Type: Fixed IP DHCP

Local IP Address: Remote IP Address:

Netmask:

Default Route: Disable Enable Auto

Unnumbered

2

Connect Disconnect **Add** Modify Delete Undo Refresh

۱- با کلیک روی گزینه Add در صفحه قبل ، جدول زیر تشکیل می شود.

The screenshot shows a web browser window with the address 192.168.1.1. The page contains configuration sections for PPP and WAN IP settings, a table of current ATM VC connections, and a row of control buttons.

PPP Settings: User Name: Password:
Type: Idle Time (min):

WAN IP Settings: Type: Fixed IP DHCP
Local IP Address: Remote IP Address:
Netmask:

Default Route: Disable Enable Auto
Unnumbered

Buttons: Connect Disconnect Add Modify Delete Undo Refresh

CURRENT ATM VC TABLE:

Select	Inf	Mod e	VPI	VCI	Enca p	NAP T	IGM P	DRo ute	IP A ddr	Rem ote I p	Net Mask	User Nam e	Stat us	Edit
<input type="checkbox"/>	ppp oe1	PPP oE	0	35	LLC	On	Off	On	0.0. 0.0	0.0. 0.0	255. 255. 255. 255	hde 912 891 6@t ct8	Dow n	

BROADBAND

Copyright © 2005-2012 D-Link Systems, Inc.

1

۱- جهت تغییرات تنظیمات WiFi ابتدا روی Wireless Setup کلیک می کنیم.

۲- برای تغییرات اسم WiFi ، (SSID) گزینه Wireless Basic را انتخاب می کنیم.

The screenshot shows the configuration interface of a D-Link DSL-2740U router. The browser address bar shows the URL 192.168.1.1. The page title is "DSL Router" and the firmware version is "ME_1.03". The main navigation menu includes "SETUP", "ADVANCED", "MAINTENANCE", "STATUS", and "HELP". The "Wireless Setup" option is highlighted with a blue box and labeled with a red "1". The "Wireless Basics" option is also highlighted with a blue box and labeled with a red "2". The "Channel Configuration" section is visible, showing options for "WAN Physical Type" (ADSL WAN selected), "Default Route Selection" (Specified selected), and "Channel Configuration" (VPI: 0, VCI: , Encapsulation: LLC selected, Channel Mode: Bridge, 802.1q: Disable selected, VLAN ID(1-4095): 0). The "PPP Settings" section includes fields for "User Name", "Password", "Type" (Continuous selected), and "Idle Time (min)".

- ۱- در این قسمت اسم WiFi دستگاه را وارد می کنیم.
- ۲- در مرحله بعد ، Channel Number را روی 6 می گذاریم.


The screenshot shows the D-Link DSL-2740U router's configuration page. The browser address bar shows '192.168.1.1'. The page title is 'Product Page: DSL-2740U' and the firmware version is 'ME_1.03'. The main navigation tabs are 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'SETUP' tab is selected, and the 'Wireless Setup' sub-tab is active. The 'WIRELESS BASIC SETTINGS' section contains a description: 'This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters.' Below this is the 'WIRELESS NETWORK SETTINGS' section, which includes a checkbox for 'Disable Wireless LAN Interface', a 'Band' dropdown set to '2.4 GHz (B+G+N)', a 'Mode' dropdown set to 'AP', and an 'SSID' text field. The 'Channel Number' dropdown is open, showing options from 1 to 13. The number 6 is highlighted in the dropdown, and a blue box with the number 1 is drawn around the SSID field. Another blue box with the number 2 is drawn around the number 6 in the dropdown menu. The 'Radio Power (Percent)' is set to 'Auto', and the 'Associated Clients' section shows 2 active clients. The 'WIRELESS OPTIONS' section includes 'Channel Width' and 'Control Sideband' dropdowns. The 'BROADBAND' section is visible at the bottom.

۱- در قسمت **Channel Width** ، پهنای باند را روی **20/40 MHz** قرار می دهیم.


۲- سپس **Apply Change** را کلیک می کنیم.

The screenshot shows the web interface of a D-Link DSL-2740U router. The browser address bar shows 192.168.1.1. The page title is "DSL Router" and the firmware version is "ME_1.03". The main navigation menu includes "SETUP", "ADVANCED", "MAINTENANCE", "STATUS", and "HELP". The "WIRELESS BASIC SETTINGS" section is active, showing options for "Disable Wireless LAN Interface", "Band" (2.4 GHz (B+G+N)), "Mode" (AP), "SSID", "Channel Number" (6), "Radio Power (Percent)" (100%), and "Associated Clients" (Show Active Clients). The "WIRELESS NETWORK SETTINGS" section is also visible, with "Channel Width" set to 20MHz and "Control Sideband" set to 20MHz. A dropdown menu for "Channel Width" is open, showing options: 20MHz, 20MHz, 40MHz, 20/40MHz, and Apply Changes. A red box highlights the "20/40MHz" option, and a red box highlights the "Apply Changes" button. A red "1" is next to the dropdown and a red "2" is next to the button.

۱- پس از اتمام ثانیه شمار ، صفحه دستگاه مجدد نمایان می شود.

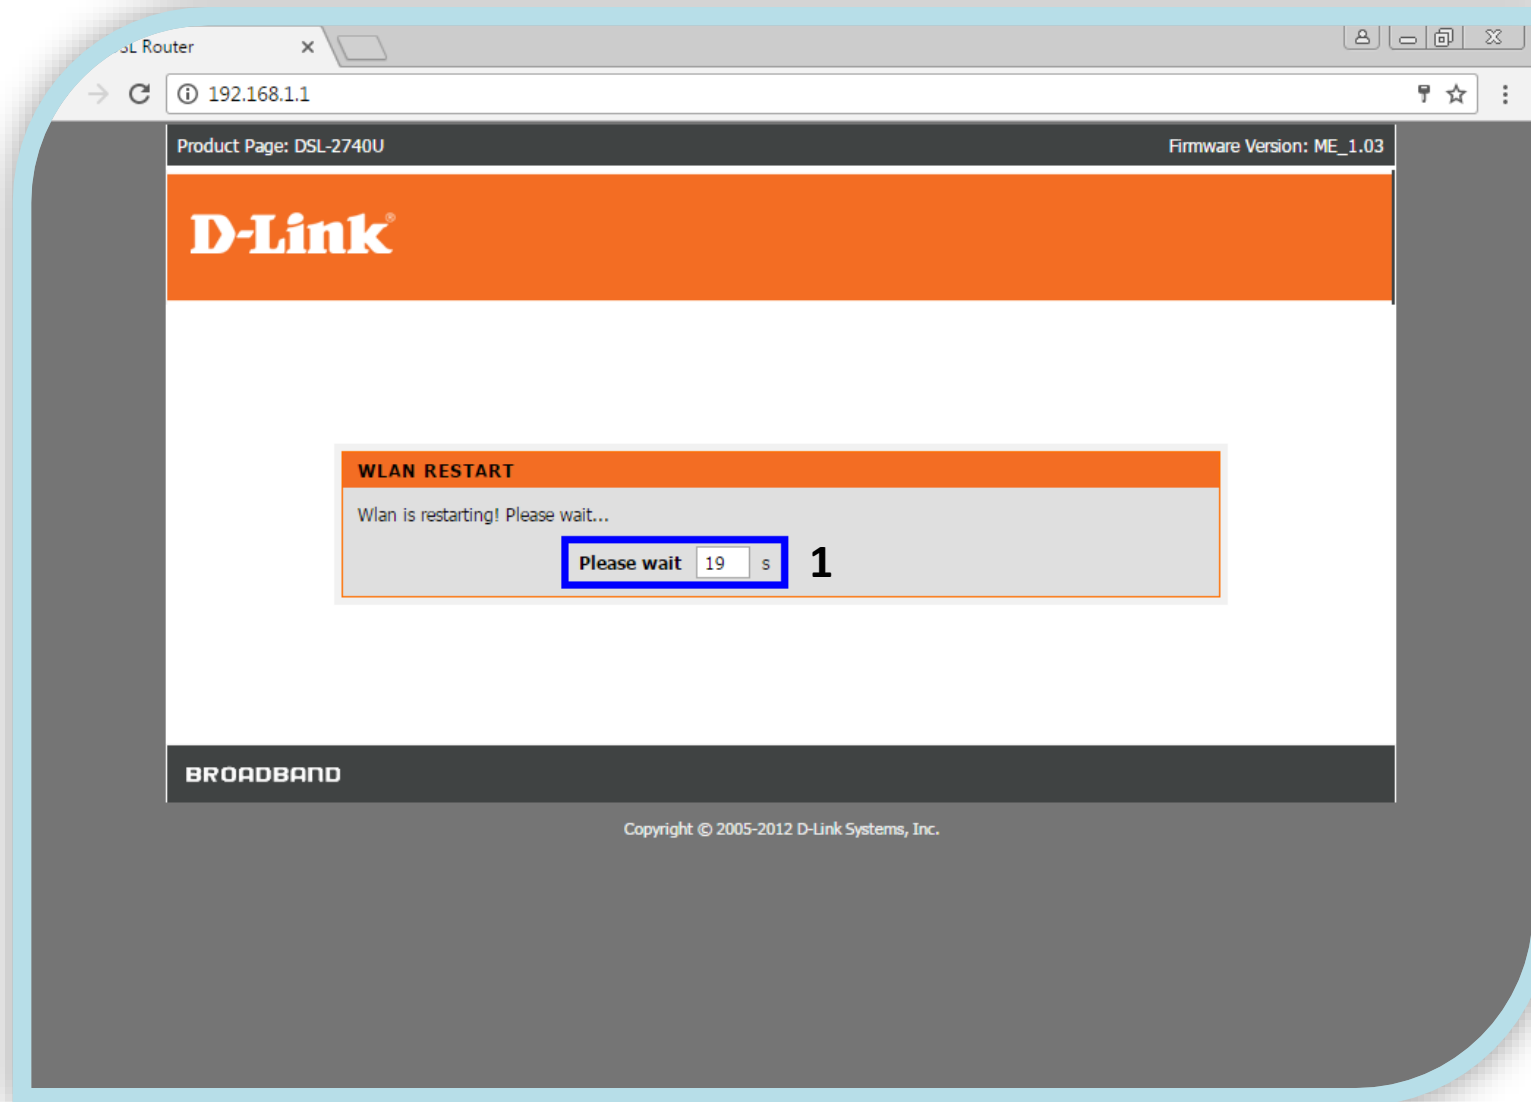

- ۱- برای تنظیمات رمز WiFi دستگاه ، ابتدا روی **Wireless Setup** نگره می‌داریم.
- ۲- سپس روی گزینه **Wireless Security** کلیک می‌کنیم.

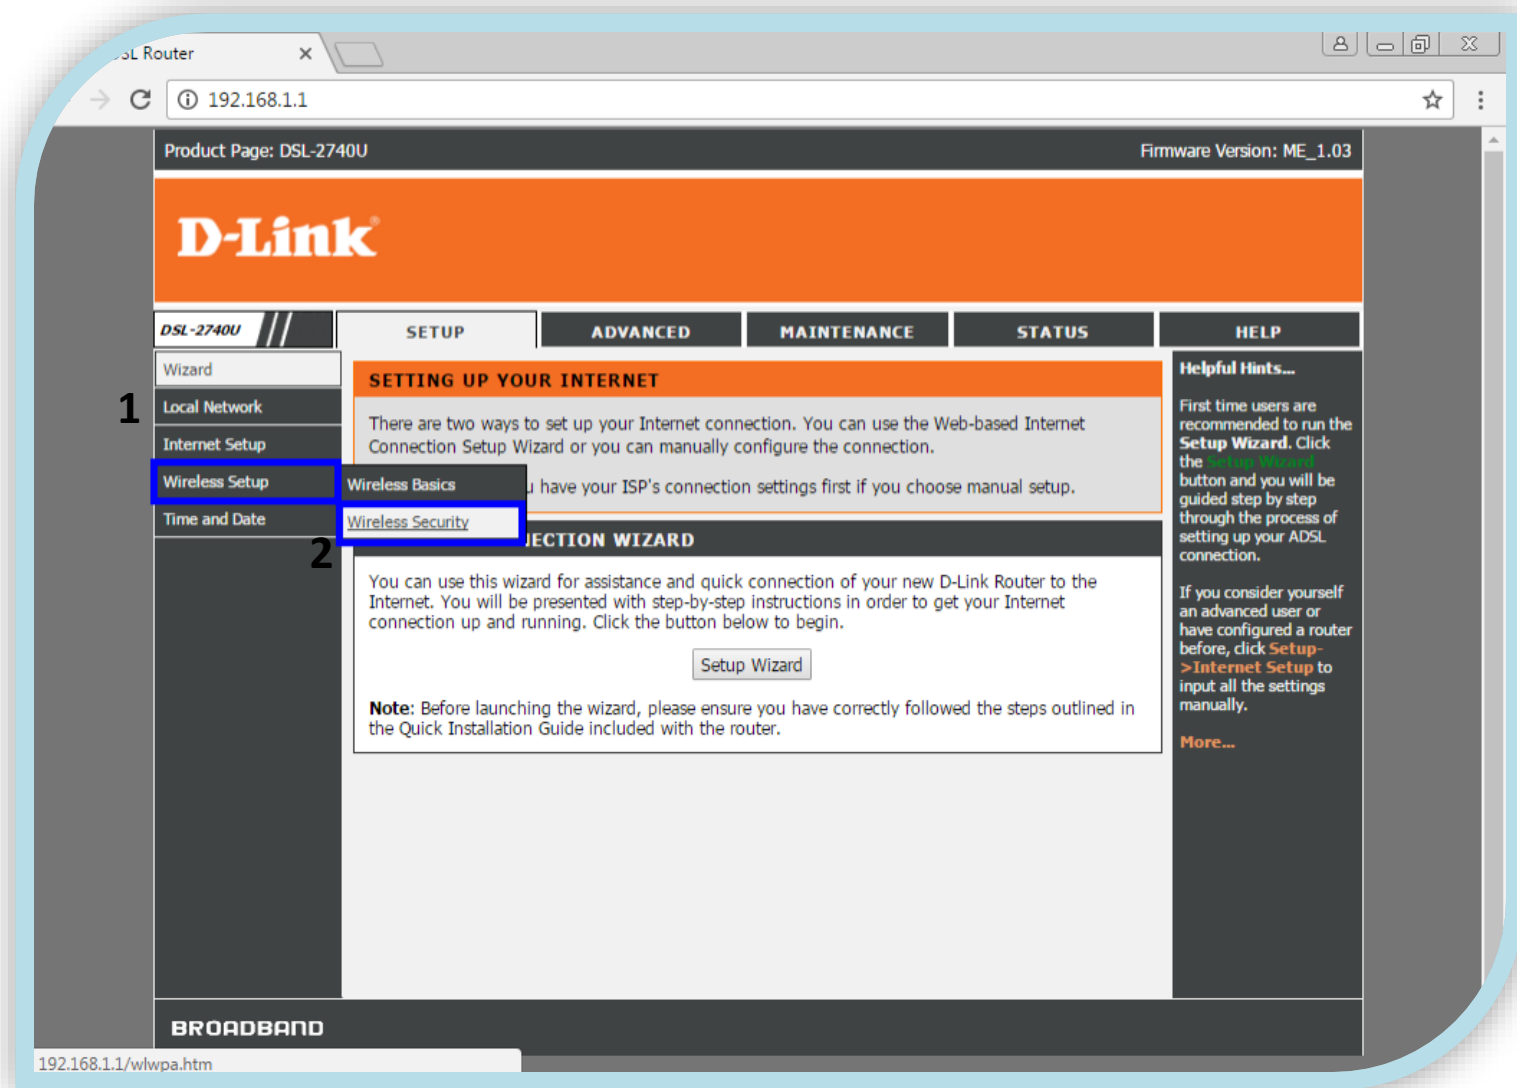

۱- این قسمت مربوط به سطح رمزگذاری دستگاه می باشد.

DSL Router

Not secure | 192.168.1.1

Product Page: DSL-2740U Firmware Version: ME_1.03

D-Link

DSL-2740U // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
Local Network
Internet Setup
Wireless Setup
Time and Date

WIRELESS SECURITY SETTINGS

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

WIRELESS SECURITY SETTINGS

1 **Encryption:** None

SSID TYPE: Root VAP0 VAP1 VAP2 VAP3

Use 802.1x Authentication

WPA Authentication Mode: WEP WPA (TKIP) WPA2 (AES) WPA2 (TKIP) WEP 128bits RADIUS Personal (Pre-Shared Key)

Pre-Shared Key Format: WPA (AES) WPA2 (AES) WPA2 (TKIP)

Pre-Shared Key: *****

Authentication RADIUS Server: IP address 0.0.0.0 Password

Note: When encryption WEP is selected, you must set WEP key value.

Apply Changes

Helpful Hints...
If you enable Wireless Security, make sure you write down the information that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.
More...

BROADBAND

۱- در قسمت Pre Shared Key رمز WiFi دستگاه را وارد می کنیم. (حداقل 8 کاراکتر)

۲- در آخر Apply Change را انتخاب می کنیم.

Product Page: DSL-2740U Firmware Version: ME_1.03

D-Link

DSL-2740U // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard
Local Network
Internet Setup
Wireless Setup
Time and Date

WIRELESS SECURITY SETTINGS

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

WIRELESS SECURITY SETTINGS

SSID TYPE: Root VAP0 VAP1 VAP2 VAP3

Encryption: WPA2 Mixed ▼

Use 802.1x Authentication WEP 64bits WEP 128bits

WPA Authentication Mode: Enterprise (RADIUS) Personal (Pre-Shared Key)

Pre-Shared Key Format: Passphrase ▼

Pre-Shared Key: 1

Authentication RADIUS Server: Port 1812 IP address 0.0.0.0 Password


Note: When encryption WEP is selected, you must set WEP key value.

Apply Changes 2


BROADBAND

Helpful Hints...
If you enable Wireless Security, make sure you write down the **Pre-Shared Key** that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.
More...

۱- پس از اتمام ثانیه شمار ، صفحه دستگاه مجدد نمایان می شود.

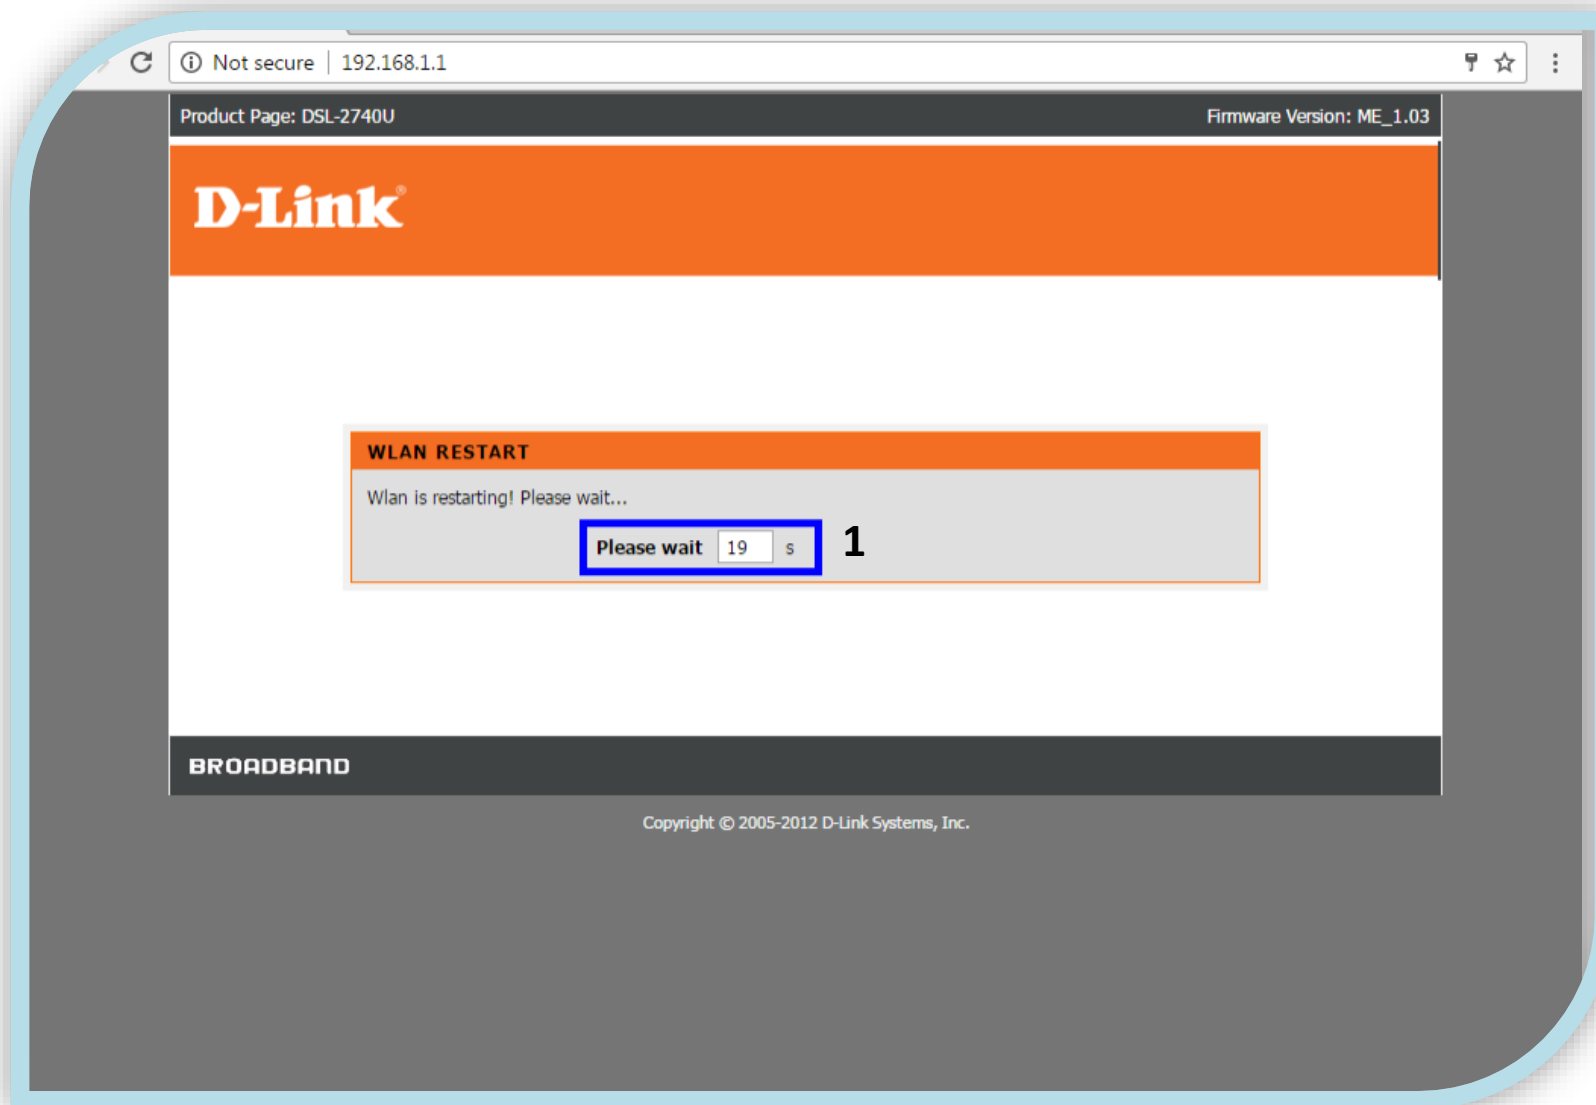

- 1- برای جلوگیری از هک شدن ، ابتدا روی **ADVANCED** کلیک می کنیم.
- 2- سپس **Advanced Wireless** را انتخاب کرده و بعد ، گزینه **WPS** را کلیک می کنیم.

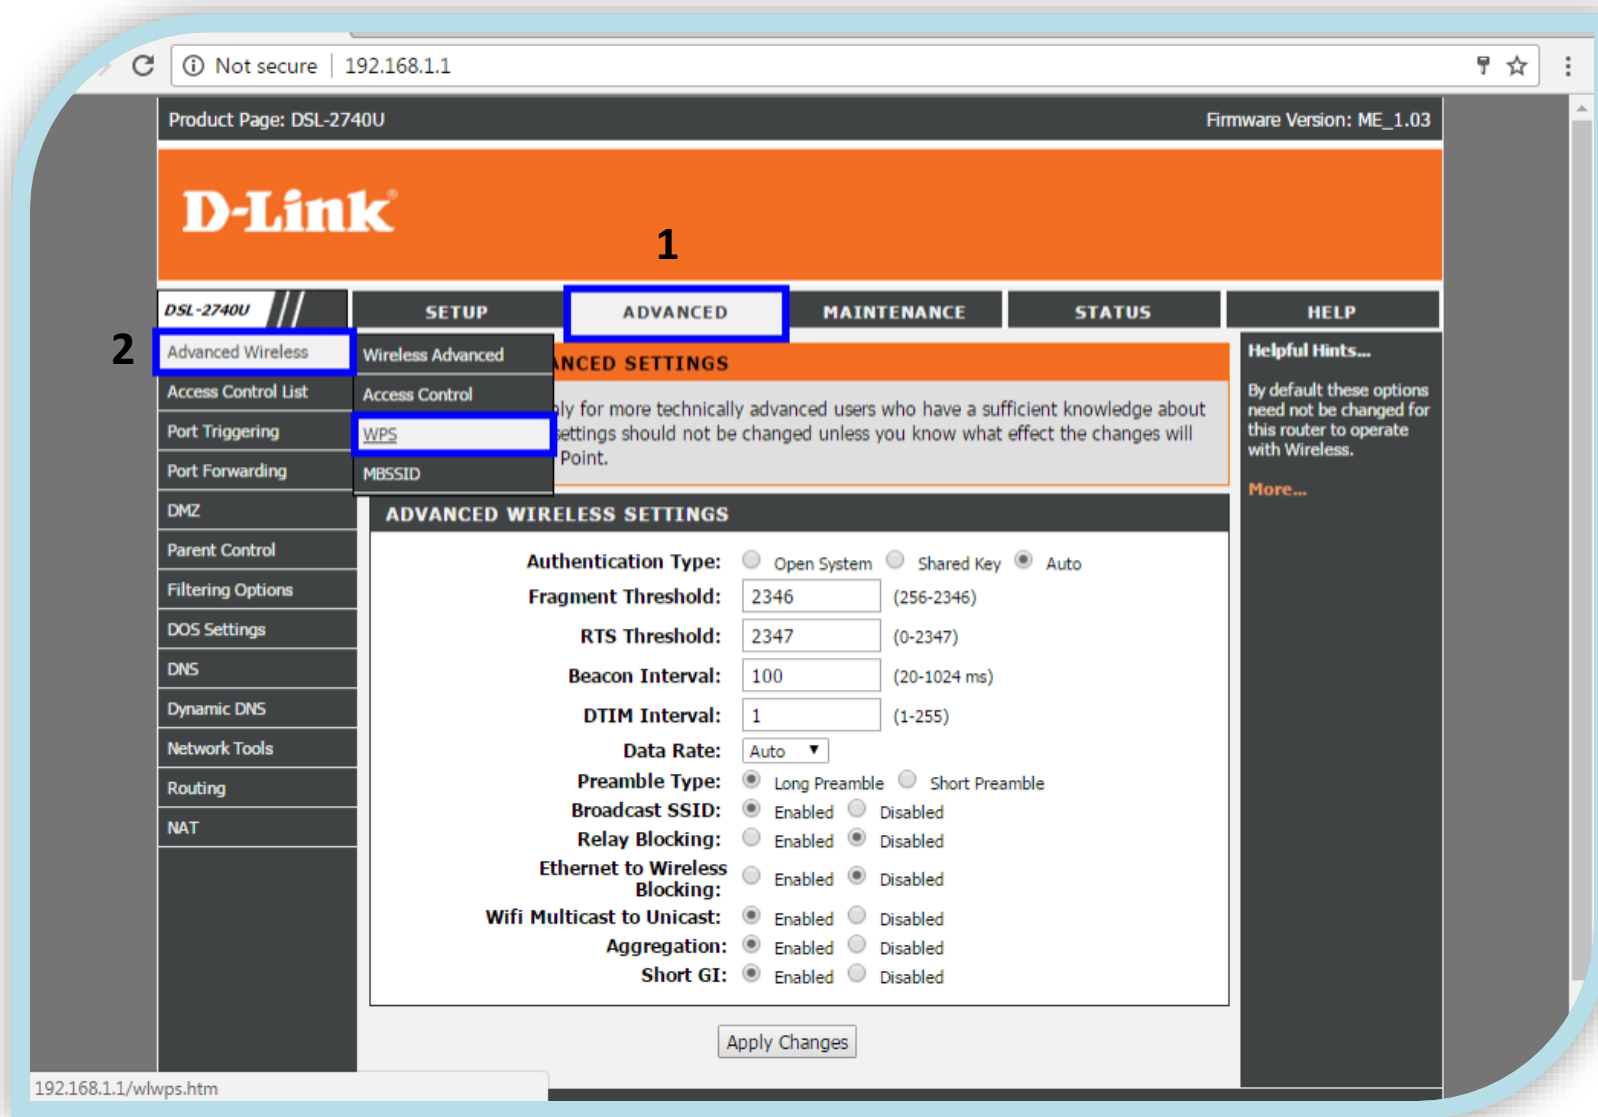

۱- گزینه **Disable WPS** را تیک می زنیم.

۲- در آخر **Apply Change** را انتخاب می کنیم.

Product Page: DSL-2740U Firmware Version: ME_1.03

D-Link

DSL-2740U // SETUP ADVANCED MAINTENANCE STATUS HELP

Advanced Wireless

Access Control List

Port Triggering

Port Forwarding

DMZ

Parent Control

Filtering Options

DOS Settings

DNS

Dynamic DNS

Network Tools

Routing

NAT

WI-FI PROTECTED SETUP

This page allows you to change the setting for WPS (Wi-Fi Protected Setup). Using this feature could let your wireless client automatically synchronize its setting and connect to the Access Point in a minute without any hassle.

WIFI PROTECTED SETTINGS

1 **Disable WPS**

WPS Status: Configured UnConfigured

Self-PIN Number: 95012117

PIN Configuration:

Push Button Configuration:

2

CURRENT KEY INFO

Authentication	Encryption	Key
WPA2-Mixed PSK	TKIP+AES	111111111

CLIENT PIN INFO

Client PIN Number:

تهیه شده در واحد خدمات پس از فروش شرکت ایزی

30 celebrating
years

D-Link[®]
Building Networks for People

25 celebrating
years

easy
Computer Services Co.

Building Networks for People

D-Link

Computer Services Co.

easy

easy
Computer Services Co.