


The logo for easyc Computer Services Co. is centered in the upper left quadrant of the image. It features the word "easyc" in a white, lowercase, cursive script font. The letter 'e' is stylized with a white, teardrop-shaped graphic element that overlaps its left side. Below "easyc" is the text "Computer Services Co." in a white, sans-serif font. The entire logo is enclosed within a white, hand-drawn, irregular oval border. The background is a solid blue color with several thin, white, wavy lines that sweep across the left and bottom portions of the frame.

*easyc*  
Computer Services Co.



راهنمای نصب و راه اندازی مودم

**DSL-2877AL,H/W:A1,A3**

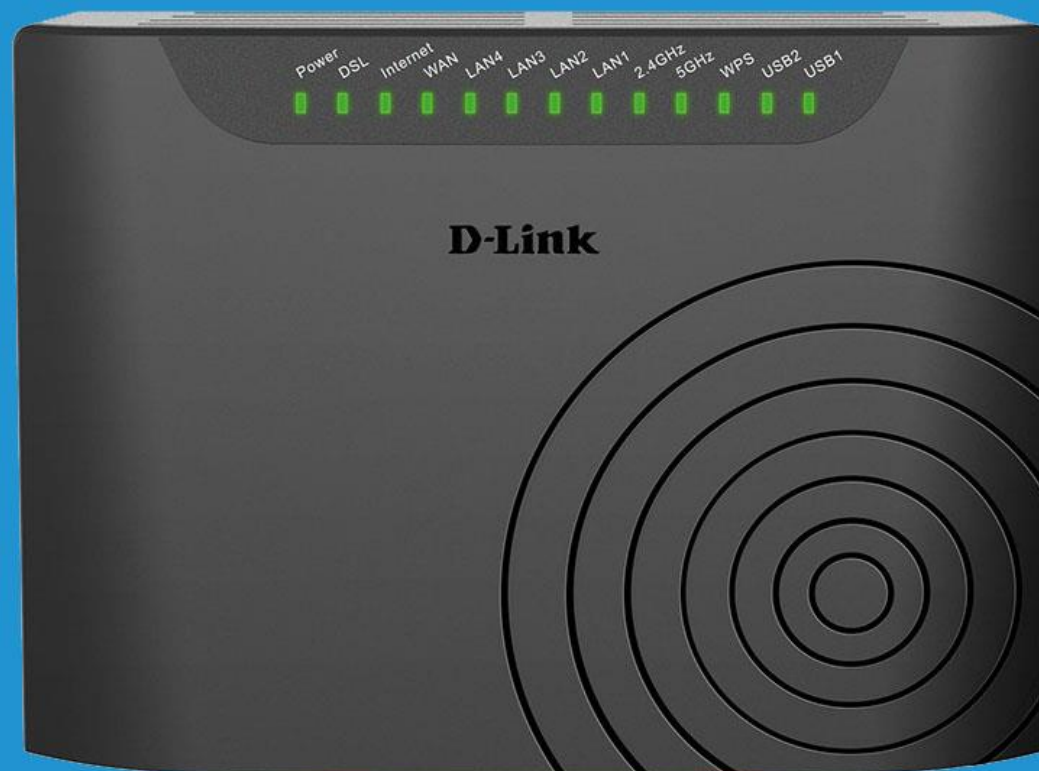


به نام خدا

در این فایل نحوه تنظیمات (Config) در مدل  
DSL2877AL-H/W:A1 آموزش داده خواهد شد.

# ظاهر دستگاه و اتصالات آن



- دستگاه DSL-2877AL را با کابل شبکه به کامپیوتر خود وصل کنید  
یک مرورگر اینترنت باز کرده و در قسمت آدرس بار IP Default دستگاه را وارد کنید.

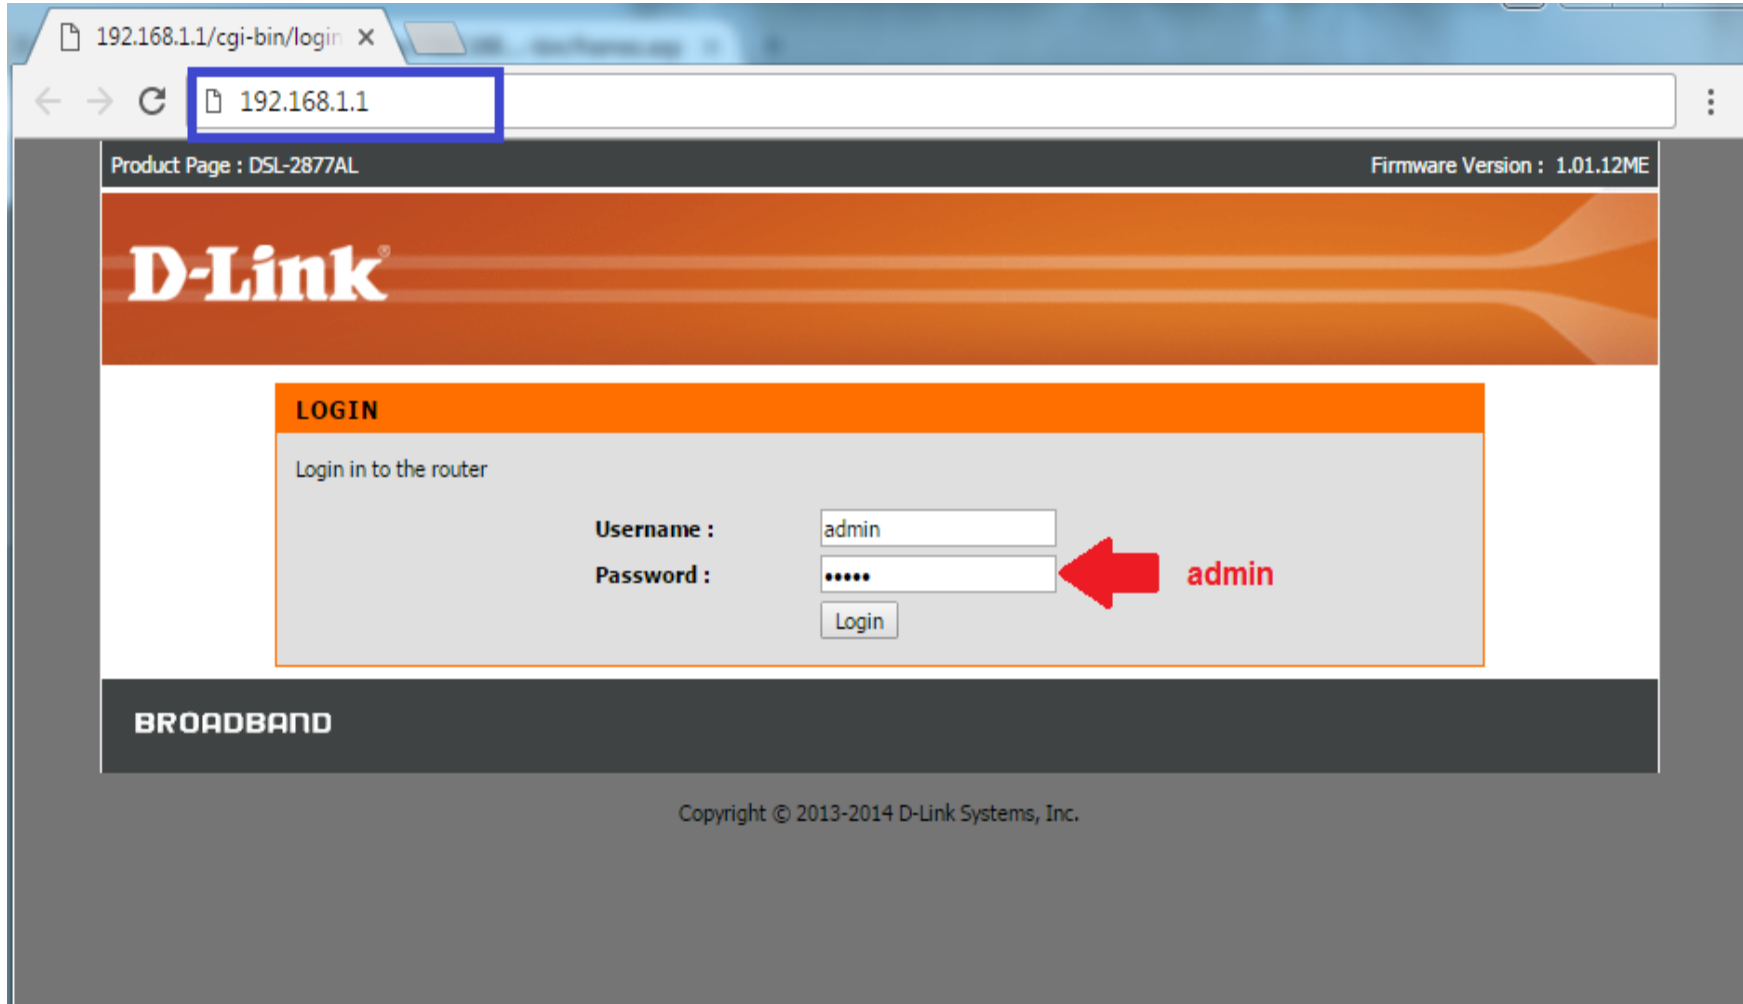

با زدن دکمه Next وارد تنظیمات Wizard دستگاه می شوید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link®

## WELCOME TO THE SETUP WIZARD

Welcome to the Setup Wizard:

- Step 1: Set your password
- Step 2: Select your Time Zone
- Step 3: Configure your internet connection
- Step 4: Name your Wireless Network
- Step 5: Secure your Wireless Network
- Step 6: Set your Wireless Security Password
- Step 7: Setup mydlink™ Cloud Services

Prev **Next** Cancel Connect

**BROADBAND**

• در بخش Wizard و Setup wizard نام دستگاه (SSID) را می توان در این قسمت تغییر داد. برای این کار در سربرگ SETUP گزینه Wizard دکمه Steup Wizard را انتخاب کنید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link

DSL-2877AL //

SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard  
Internet Setup  
Wireless Setup  
LAN Setup  
3G/4G Setup  
WAN Failover Priority Setup  
Time and Date  
IPv6RD  
mylink™ Settings

Internet Offline

Reboot Logout

## SETTING UP YOUR INTERNET

There are two ways to set up your Internet connection: you can use the Web-based Internet Connection Setup Wizard, or you can manually configure the connection.

Please make sure you have your ISP's connection settings first if you choose to do a manual setup.

## INTERNET CONNECTION WIZARD

You can use this wizard to help you connect to the Internet quickly and correctly. In order to get your Internet connection up and running, You should follow the step-by-step instructions to configure the Internet setting. Click the button below to begin.

[Setup Wizard](#)

**Note:** Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the Router.

**Helpful Hints..**

If you are setting up networking for the first time and have not configured the Router yet, click on "**Setup Wizard**". This will lead you through a step-by-step process to configure the Internet settings.

If you consider yourself an advanced user or have configured a router before, click **Setup->Internet Setup** to input all the settings manually.

**More...**

در این بخش از **SETUP WIZARD** شما قادر خواهید بود تا برای ورود به دستگاه مودم رمز عبور دلخواه خود را وارد کنید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link®

**STEP 1: SET YOUR PASSWORD**

To secure your new networking device, please set and verify a password below:

Password :

Verify Password :

**BROADBAND**



## SELECT YOUR TIME ZONE •

در این قسمت ازویزارد شما باید موقعیت مکانی خود را انتخاب کنید و روی Tehran قرار دهید

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

**D-Link**

**STEP 2: SELECT YOUR TIME ZONE**

Select the appropriate time zone for your location. This information is required to configure the time-based options for the router.

Time Zone: (GMT+03:30) Tehran

Prev Next Cancel Connect

**BROADBAND**

- در این مرحله نام کشور ، نام شرکت سرویس ارائه دهنده ADSL و نوع پروتکل خود را مشخص کنید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link

## STEP 3: CONFIGURE YOUR INTERNET CONNECTION

Please select your Interface and Protocol from the list below.

Internet Connection Type : ADSL

Country : Iran

Internet Service Provider : IRAN TCT

Protocol : PPPoE

Connection Type : LLC

VPI : 0 (0-255)

VCI : 35 (32-65535)

MTU : 1492

Prev Next Cancel Connect

BROADBAND

در این مرحله از Wizard شما باید نام کاربری و رمز عبور سرویس ارائه دهنده ADSL خود را وارد نمایید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME



**SET PPPOE**

Enter the PPPoE information provided to you by your ISP. Click Next to continue.


User Name :

Password :

Confirm Password :

**BROADBAND**

- در این قسمت شما می توانید یک نام دلخواه برای باند وایرلس 2.4 و باند 5G انتخاب کنید.

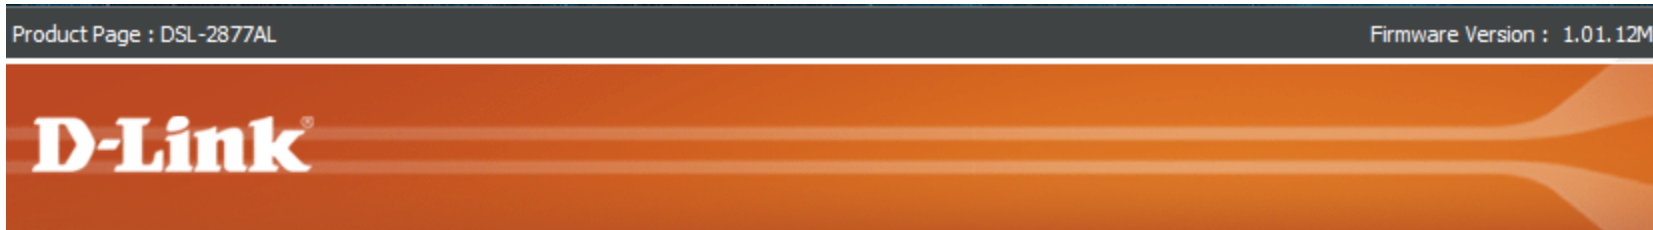

**STEP 4: NAME YOUR WIRELESS NETWORK**

Your wireless network needs a name so it can be easily recognised by wireless clients. For security purpose, it is highly recommended to change the default pre-configured network name.


**2.4G Wireless Network Name (SSID) :**

**5G Wireless Network Name (SSID) :**

**BROADBAND**

• در این بخش ابتدا در سربرگ **setup** رفته و سپس گزینه **INTERNET SETUP** را انتخاب کنید و مقادیر **VPI** و **VCI** سرویس **ADSL** خود را وارد نمایید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME



DSL-2877AL	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
------------	-------	----------	-------------	--------	------

Wizard

**Internet Setup**

Wireless Setup

LAN Setup

3G/4G Setup

WAN Failover Priority Setup

Time and Date

IPv6RD

mylink™ Settings

Internet Offline

Reboot Logout

### INTERNET SETUP

If you are configuring this device for the first time, we recommend that you click Setup Wizard button, and follow the instructions on screen.

### MODE SELECT

Current WAN failover priority from high to low is DSL, Ethernet WAN, 3G/4G. If you want to change WAN priority, you can click [SETUP->WAN Failover Priority Setup](#).

Internet Connection Type: ADSL

### ATM VC SETTING

PVC: 0

Enable Virtual Circuit:

Country: Iran

ISP: IRAN TCT

VPI: 0 (range: 0~255)

VCI: 35 (range: 32~65535)

Service Category: ubr

802.1q:  Activated  Deactivated

VLAN ID: 0 (range: 0~4095)

### Helpful Hints..

If you are the first time use this device, we recommend you to run the wizard. It will guide you step by step.

Here you can quickly setup your WAN connection. These details should have been provided by your ISP (Internet Service Provider). Often you will receive a bundle pack with the important account information.

Very often in the United Kingdom User will require to PPPoA connection type. Users in Germany should select PPPoE when applicable. Please be careful with the username and password. They are case sensitive. For most uses, if you are unable to connect it, your username and password combination may be incorrect.

در قسمت wan setting گزینه ppoe را انتخاب کنید.

IPV4/IPV6

IP Version:  IPv4  IPv4/IPv6  IPv6

More...

**WAN SETTINGS**

Configure your DSL connection here. Please consider the information of your provider on the settings otherwise it may not be possible to establish a connection.

**Dynamic IP Address** Choose this option to obtain an IP address automatically from your ISP. (For most Cable modem users)

**Static IP Address** Choose this option to set static IP information provided to you by your ISP.

**PPPoE** Choose this option if your ISP uses PPPoE. (For most DSL users)

**PPPoA** Choose this option if your ISP uses PPPoA. (For most DSL users)

**Bridge Mode** Choose this option if your ISP uses Bridge.

درکادر آبی رنگ نام کاربری و کلمه عبور سرویس ISP خود را وارد می کنیم و در نهایت دکمه Apply را انتخاب کنید.

**WAN**

Username:

Password:

Confirm Password:

Connection Type: PPPoE LLC

Service Name:  (optional)

AC name:  (optional)

Authentication Protocol: AUTO

MTU: 1492 (0:default)

TCP MSS: 1452 (0:default)

Default Route:

NAT Enable:

Enable PPPoE Passthrough:

IGMP Proxy:


Connection:  Always On (Recommended)  
 Connect On-Demand (Close if idle for  minutes)  
 Connect Manually

Get IP Address:  Static  Dynamic

Static IP Address:

IP Subnet Mask:

Gateway:

Apply 

**BROADBAND**

- برای تعیین اسم و رمز wifi در قسمت wireless setup رفته و گزینه manual wireless connection setup را انتخاب کنید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link

DSL-2877AL	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Wizard	<b>WIRELESS CONNECTION</b> <p>There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup wizard or you can manually configure the connection.</p> <p><b>Please note that changes made on this section will also need to be duplicated to your wireless clients and PC.</b></p>				<b>Helpful Hints..</b> <p>Changing your Wireless Network Name (SSID) is the first step in securing your wireless network. Change it to a familiar name that does not contain any personal information.</p> <p><a href="#">More...</a></p>
Internet Setup	<b>WIRELESS CONNECTION SETUP WIZARD</b> <p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.</p> <p><input type="button" value="Wireless Connection Setup Wizard"/></p> <p><b>Note:</b> Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p>				
Wireless Setup	<b>ADD WIRELESS DEVICE WITH WPS(WI-FI PROTECTED SETUP) WIZARD</b> <p>This wizard is designed to assist you in connecting your wireless device to your router. It will guide you through step-by-step instructions on how to get your wireless device connected. Click the button below to begin.</p> <p><input type="button" value="Add Wireless Device with WPS"/></p>				
LAN Setup	<b>MANUAL WIRELESS CONNECTION OPTIONS</b> <p>If your wireless network is already set up with Wi-Fi Protected Setup, manual configuration of the wireless network will destroy the existing wireless network. If you would like to configure the wireless settings of your new D-Link Systems Router manually, then click on the Manual Wireless Network Setup button below.</p> <p><input type="button" value="Manual Wireless Connection Setup"/> ←</p>				
3G/4G Setup					
WAN Failover Priority Setup					
Time and Date					
IPv6RD					
mydlink™ Settings					
Internet Offline					
<input type="button" value="Reboot"/> <input type="button" value="Logout"/>					



## • تنظیمات وایرلس باند 2.4

در این قسمت مطابق شکل زیر تنظیمات مربوط به wifi مودم را انجام دهید. توجه داشته باشید گزینه MBSSID AP Isolation را غیرفعال نگه دارید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

**D-Link**

DSL-2877AL // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard  
Internet Setup  
Wireless Setup  
LAN Setup  
3G/4G Setup  
WAN Failover Priority Setup  
Time and Date  
IPv6RD  
mydlink™ Settings  
Internet Offline  
Reboot Logout

### 2.4G WIRELESS CONFIGURATION

These are the wireless settings for the AP (Access Point) Portion, can support or input 1 ssid.

#### WIRELESS BASIC

Wireless Enabled :   
MBSSID AP Isolation :   
Multiple SSID : dlink-2877AL-z  
SSID Interface Enabled :   
Hide SSID :  Disable  Enable  
WMM :  Disable  Enable  
802.11 Mode : Mixed 802.11n,802.11g and 802.11b  
Channel Width : 20/40 MHz  
Extension Channel : below the control channel  
Channel : 6  AutoChannel  
Security : WPA/WPA2  
Cipher Type : Both  
Group Key Interval : 3600 Seconds

#### WPA TYPE

802.1x  PSK Value

#### PSK

PsK Network Key: 11111111

Helpful Hints...  
Changing your Wireless Network Name (SSID) is the first step in securing your wireless network. Change it to a familiar name that does not contain any personal information.  
More...

رمز عبور وای فای را وارد کنید

- با غیرفعال کردن گزینه WI-FI PROTECTED SETUP (WPS) مانع هک شدن دستگاه خود شوید

**WIRELESS SCHEDULE**

Schedule Enabled :

Begin Time :  :

End Time :  :

Day :  Mon  Tue  Wed  
 Thu  Fri  Sat  Sun

**WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)**

Enable :

Current PIN : 66734871

Wi-Fi Protected Status : Enabled/Configured


در این قسمت از تنظیمات شما میتوانید بوسیله یک دستگاه دانگل از طریق سیم کارت به اینترنت متصل شوید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME

# D-Link

DSL-2877AL // SETUP ADVANCED MAINTENANCE STATUS HELP

Wizard  
Internet Setup  
Wireless Setup  
LAN Setup  
**3G/4G Setup**  
WAN Failover Priority Setup  
Time and Date  
IPv6RD  
mydlink™ Settings

 Internet Online


Reboot Logout

### 3G/4G NETWORK

This section allows you to configure the 3g network settings of your router. Please note that this section is optional and you should not need to change any of the settings here to get your network up and running.

### 3G/4G SETTINGS

Current WAN failover priority from high to low is 3G/4G, DSL, Ethernet WAN. If you want to change WAN priority, you can click [SETUP->WAN Failover Priority Setup](#)

 Status  Activated  Deactivated

### ISP SETTINGS

Default APN  Yes  No

TELEPHONE #99#

APN

UserName

Password

### CONNECTION SETTINGS

Connection  Always On (Recommended)  
 Connect On-Demand (Close if idle for  minutes)  
 Connect Manually

PPP Authentication Auto

Default Route  Yes  No

NAT  Enabled  Disabled


TCP MTU  bytes(0 means use default:1492)



Apply

**Helpful Hints..**  
Note that the **user name** and **password** are case-sensitive. Most connection issues are caused by incorrect **user name** or **password** combinations.  
[More...](#)

درسبرگ WAN FAILOVER PRIORITY SETUP شما میتواند جهت اتصال به اینترنت برای مودم خود با دکمه های up/down الویت تعیین کنید.

Product Page : DSL-2877AL Firmware Version : 1.01.12ME



DSL-2877AL	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Wizard	<b>WAN FAILOVER PRIORITY</b> You can use this page to change WAN failover priority. Default WAN failover priority order is DSL, Ethernet WAN, 3G/4G.				<b>Helpful Hints..</b> You can set the WAN failover priority base on your requirement or your ISP setup. <a href="#">More...</a>
Internet Setup	<b>WAN FAILOVER PRIORITY SETTINGS</b>				
Wireless Setup	<input checked="" type="radio"/> DSL (High Priority)				
LAN Setup	<input type="radio"/> 3G/4G (Middle Priority)				
3G/4G Setup	<input type="radio"/> Ethernet WAN (Low Priority)				
WAN Failover Priority Setup	<input type="button" value="Up"/> <input type="button" value="Down"/> 				
Time and Date					
IPv6RD					
mylink™ Settings					
 Internet Online					
<input type="button" value="Reboot"/> <input type="button" value="Logout"/>					

تهیه شده در واحد خدمات پس از فروش شرکت ایزی

30 celebrating  
years

**D-Link**<sup>®</sup>  
Building Networks for People

25 celebrating  
years

**easy**  
Computer Services Co.

Building Networks for People

Computer Services Co.

**easy**  
Computer Services Co.